


SUPER PASS II[®]

FEATURES

LEDs Illuminate the Case During 'Sensing', 'Pre-alarm' and Full Alarm Modes

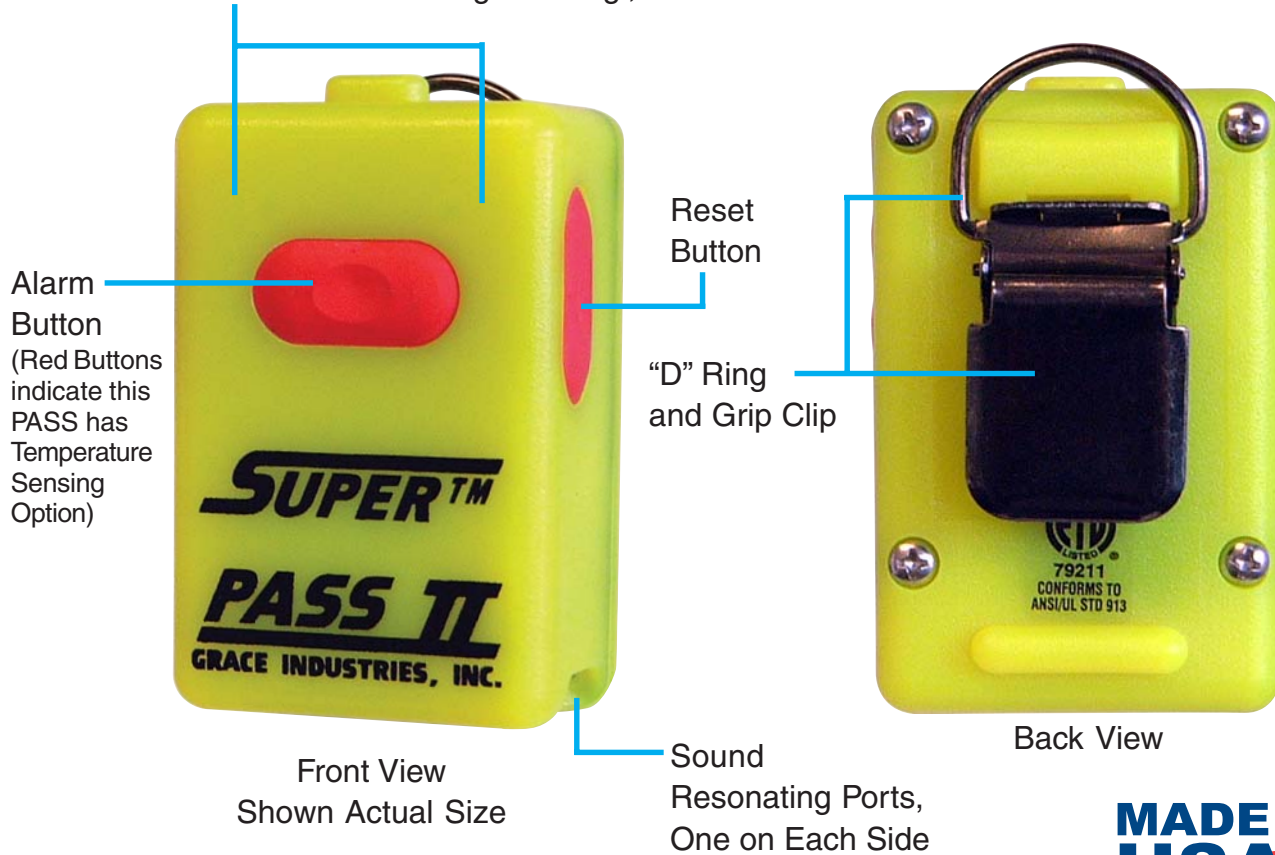

MADE IN USA

SUPER PASS II[®] SPECIFICATIONS & FEATURES

NFPA Compliant and Intrinsically Safe	Third Party Tested to NFPA 1982 (PASS), 1998 edition. Certified UL913 for Class 1, Division 1, Group A, B, C and D Hazardous locations.
Auto-On Activation	Proprietary Tethered Accountability Key
Motion Sensing	Solid State Accelerometer
Complete Protection with or without SCBA	Stand alone system for all situations
Automatic Motion Sensing - Man Down Alarm Activation	30-35 seconds - Loud Audio Alarm and Alarm signal to Command Base and indicated on Command Screen
Manual Mode Alarm Activation (Panic Button)	Manual Push Button-Need Emergency Assistance
Confirmation of TPASS-3 Active	Visible Flashing LED lights
Temperature Sensing - Alarm	Optional

SUPER PASS II[®] - Physical Attributes

Dimensions (approximate)	Compact Size 2" W, 3-1/8" H, 1-1/2" deep
Weight (approximate)	8 oz. With Battery and W/O Accountability Key
Low Battery Alarm	Alarm @ 20% capacity (1 hr. minimum in alarm mode remaining)
Battery	9 volt Duracell MN 1604 recommended and included
Battery Life (approximate)	70 hours In Sensing Mode and 2-4 hours in Alarm Mode