


PA2000

FEATURES

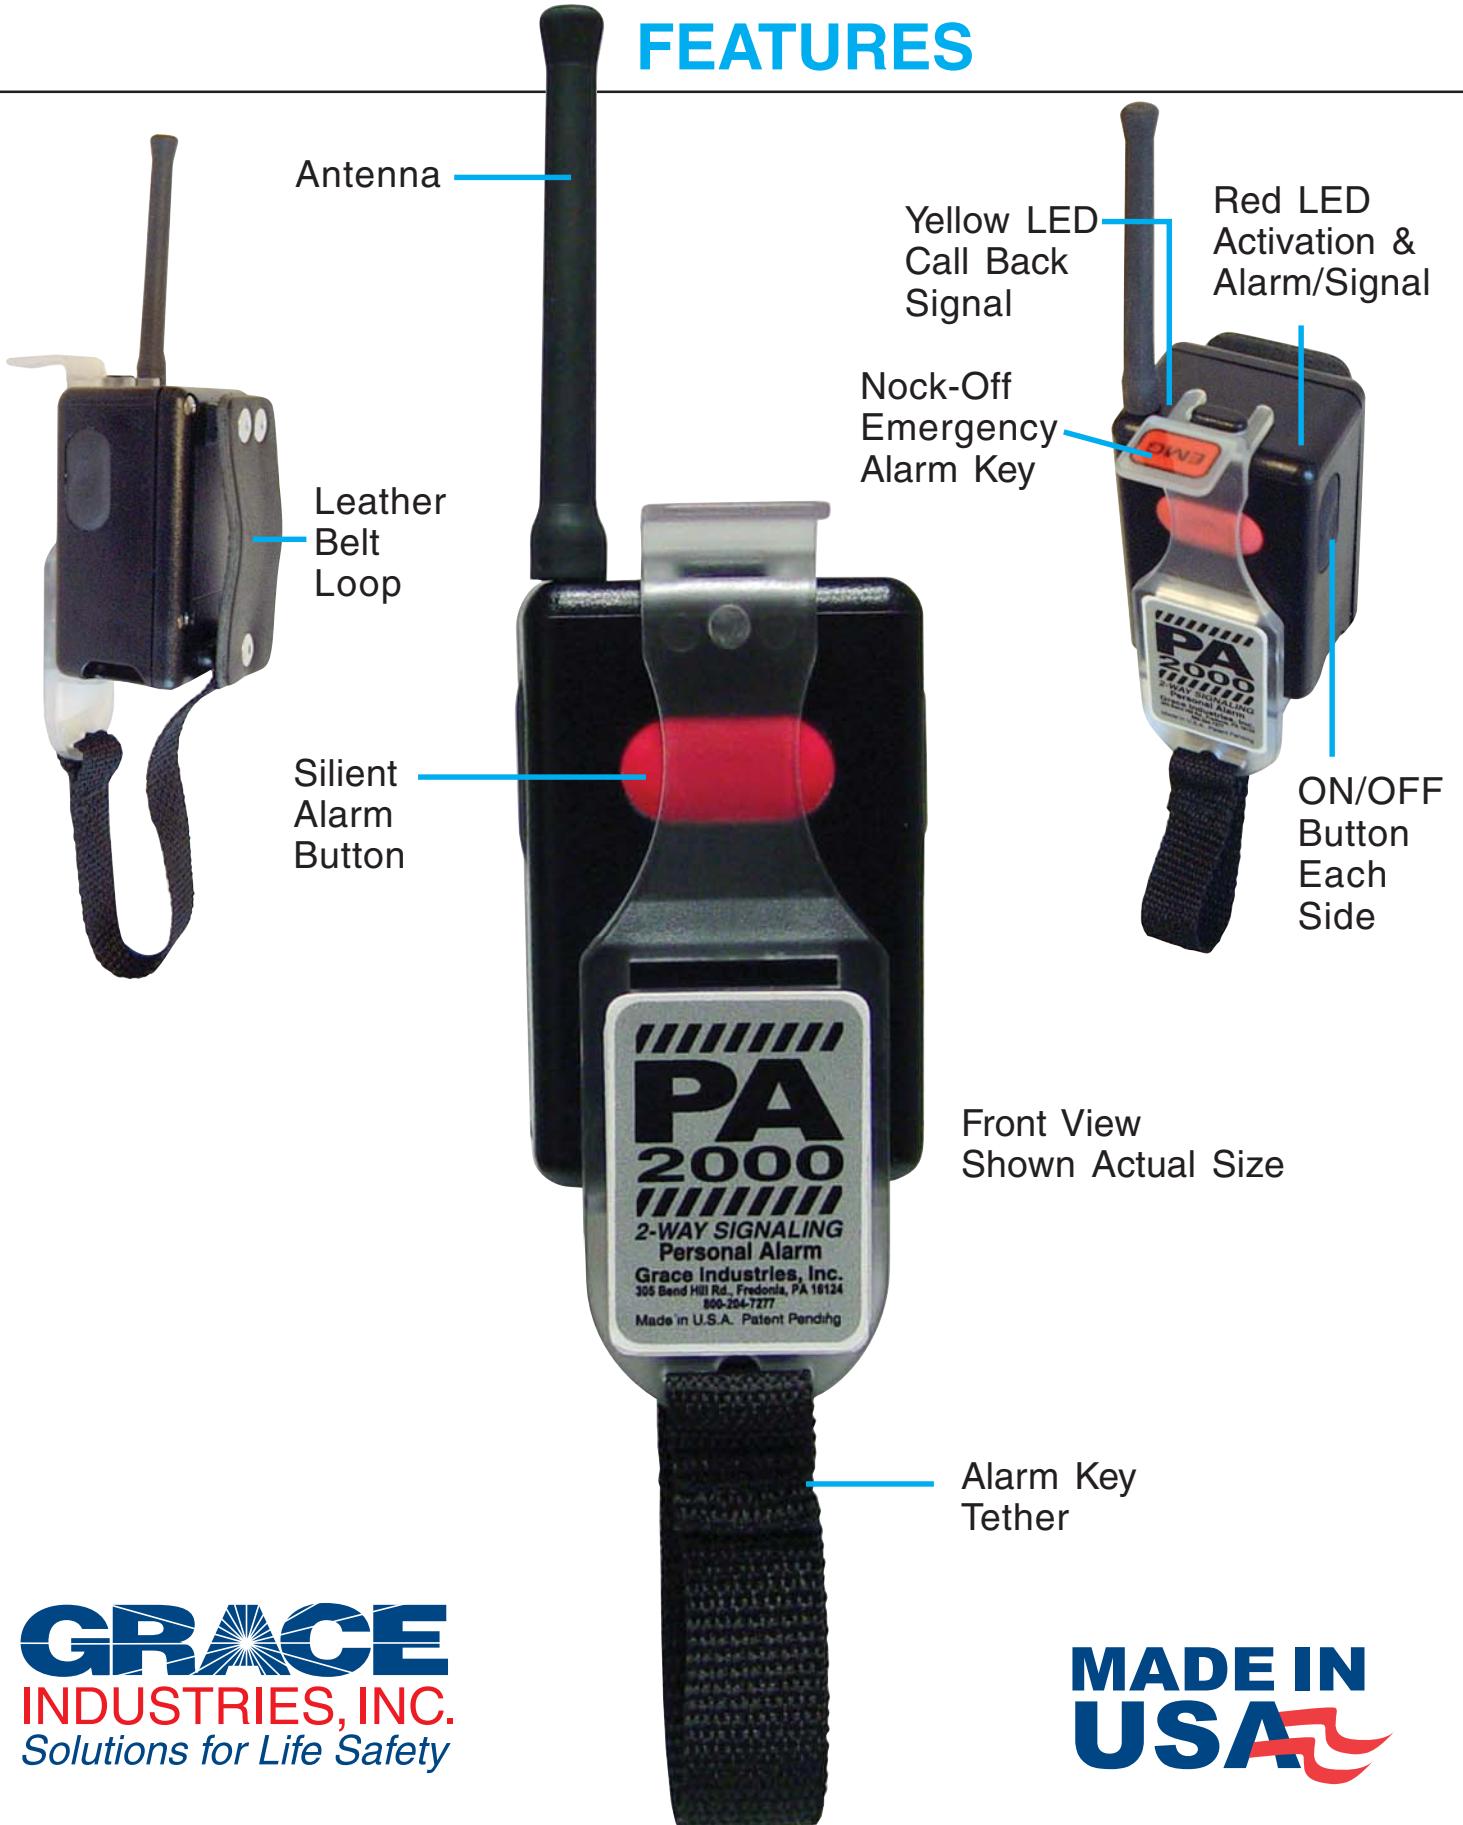

Antenna

Yellow LED
Call Back
Signal

Red LED
Activation &
Alarm/Signal

Leather
Belt
Loop

Nock-Off
Emergency
Alarm Key

Silent
Alarm
Button

ON/OFF
Button
Each
Side

Front View
Shown Actual Size

Alarm Key
Tether

GRACE
INDUSTRIES, INC.
Solutions for Life Safety

**MADE IN
USA**

PA2000 2-WAY SIGNALING SYSTEM

Features and Detailed Specifications	Description
NFPA Compliant and Intrinsically Safe	Third Party Tested to NFPA 1982 (PASS), 1998 edition. Certified UL913 for Class 1, Division 1, Group A, B, C and D Hazardous locations.
Auto-On Activation	Proprietary Tethered Accountability Key
Motion Sensing	Solid State Accelerometer
High Frequency 2 Way Radio	902-928 MHz No FCC License Required
Smart-Signal Technology - Proprietary	Each PA2000 is a Smart Repeater for critical signals providing superior in building performance
TPASS-3 Complete Protection with or without SCBA	Stand alone system for all situations
Automatic Motion Sensing - Officer Down Alarm Activation	30-35 seconds - Loud Audio Alarm and Alarm signal to Command Base and indicated on Command Screen
Manual Mode Alarm Activation (Panic Button)	Manual Push Center Red Button-Need Emergency Assistance
Receive Call-Back Signals	Initiated from Command Base
Call-Back PA2000 Only – Dual Indicators	Audio and Visual, Loud Alarm and Flashing LEDs (1 Red LED on top and two yellow LEDs on front)
Confirmation of PA2000 is Active	Visible Flashing LED lights
Check-in Status Signal	Periodic signal sent to Command Base
PA200 - Physical Attributes	
Dimensions (approximate)	Compact Size 2" W, 3-1/8" H, 1-1/2" deep
Weight (approximate)	8 oz. With Battery and Emergency Alarm Key
Low Battery Alarm	Alarm @ 20% capacity (1 hr. minimum in alarm mode remaining)
Battery	9 volt Duracell MN 1604 recommended and included
Battery Life (approximate)	30 hours In Sensing Mode and 2-4 hours in Alarm Mode



GRACE

 INDUSTRIES, INC.

Solutions for Life Safety

1.800.204.7277